



ABS - AC STANDARD HARDWARE LOCATIONS

1-1/2 PAIR 4-1/2 BUTT HINGES FRAME

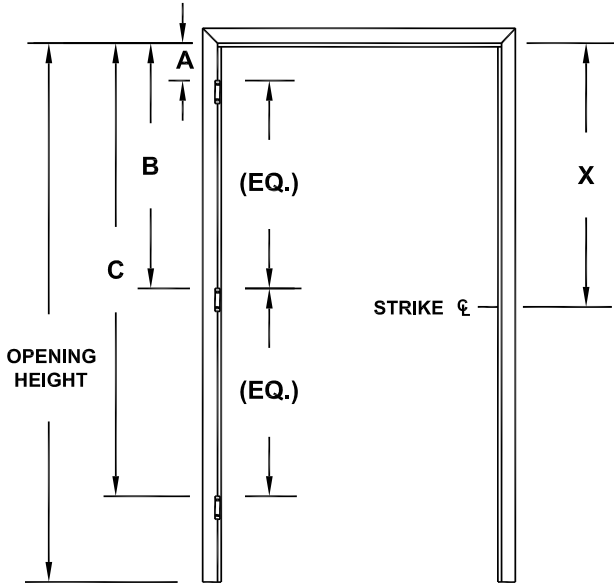

ROUGH OPENING

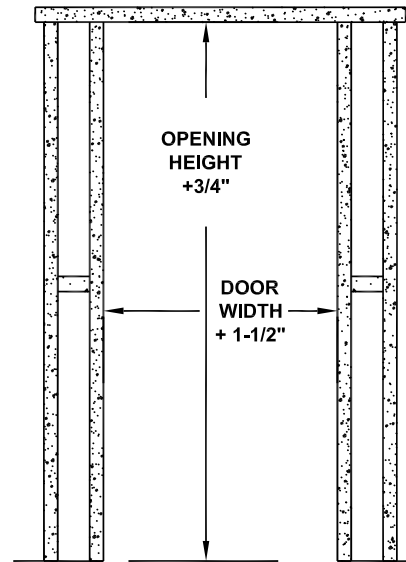

DIMENSIONS				
OPENING HEIGHT	A	B	C	X
80	5	35-1/4	65-1/2	42
81	5	35-3/4	66-1/2	43
82	5	36-1/4	67-1/2	44
83	5	36-3/4	68-1/2	45
84	5	37-1/4	69-1/2	46
85	5	37-3/4	70-1/2	47
86	5	38-1/4	71-1/2	48
87	5	38-3/4	72-1/2	49
88	5	39-1/4	73-1/2	50
89	5	39-3/4	74-1/2	51
90	5	40-1/4	75-1/2	52
91	5	40-3/4	76-1/2	53
92	5	41-1/4	77-1/2	54
93	5	41-3/4	78-1/2	55
94	5	42-1/4	79-1/2	56
95	5	42-3/4	80-1/2	57
96	5	43-1/4	81-1/2	58
97	5	43-3/4	82-1/2	59

DIMENSIONS				
OPENING HEIGHT	A	B	C	X
98	5	44-1/4	83-1/2	60
99	5	44-3/4	84-1/2	61
100	5	45-1/4	85-1/2	62
101	5	45-3/4	86-1/2	63
102	5	46-1/4	87-1/2	64
103	5	46-3/4	88-1/2	65
104	5	47-1/4	89-1/2	66
105	5	47-3/4	90-1/2	67
106	5	48-1/4	91-1/2	68
107	5	48-3/4	92-1/2	69
108	5	49-1/4	93-1/2	70
ABS-AC WILL ACCOMODATE ANY HINGE OR STRIKE LAYOUT - ON REQUEST				


NOTES :

1. ALL DIMENSIONS ARE IN INCHES.
2. ALL DIMENSIONS ARE MEASURED FROM TOP OF OPENING HEIGHT TO TOP OF HINGE




ABS - AC STANDARD HARDWARE LOCATIONS

2 PAIR 4-1/2 BUTT HINGES FRAME

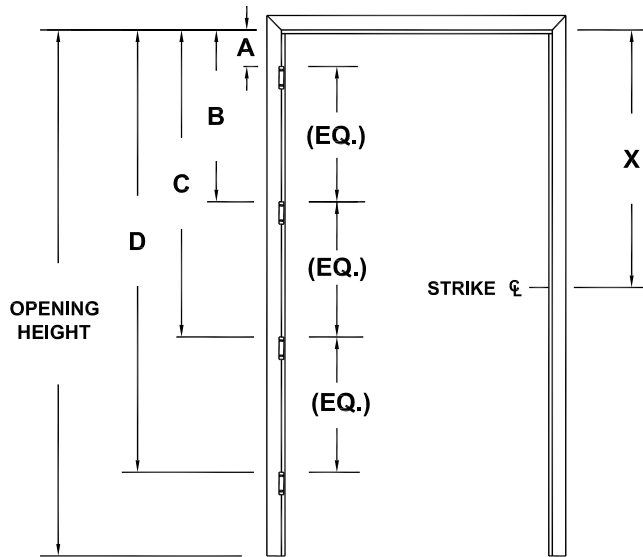

ROUGH OPENING

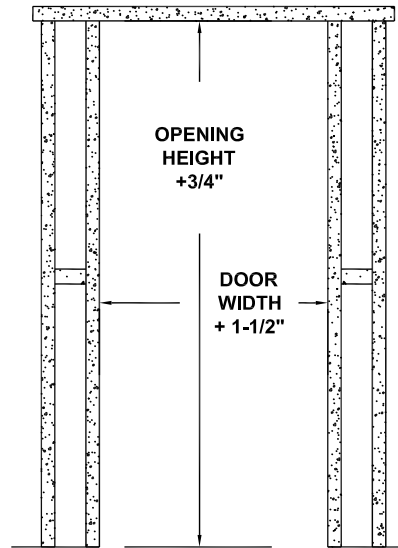

OPENING HEIGHT	DIMENSIONS				
	A	B	C	D	X
90	5	28-1/2	52	75-1/2	52
91	5	28-7/8	52-3/4	76-5/8	53
92	5	29-1/4	53-1/2	77-3/4	54
93	5	29-1/2	54	78-1/2	55
94	5	29-7/8	54-3/4	79-5/8	56
95	5	30-1/4	55-1/2	80-3/4	57
96	5	30-1/2	56	81-1/2	58
97	5	30-7/8	56-3/4	82-5/8	59
98	5	31-1/4	57-1/2	83-3/4	60
99	5	31-1/2	58	84-1/2	61
100	5	31-7/8	58-3/4	85-5/8	62
101	5	32-1/4	59-1/2	86-3/4	63
102	5	32-1/2	60	87-1/2	64
103	5	32-7/8	60-3/4	88-5/8	65
104	5	33-1/4	61-1/2	89-3/4	66
105	5	33-1/2	62	90-1/2	67
106	5	33-7/8	62-3/4	91-5/8	68
107	5	34-1/4	63-1/2	92-3/4	69

OPENING HEIGHT	DIMENSIONS				
	A	B	C	D	X
108	5	34-1/2	64	93-1/2	70
109	5	34-7/8	64-3/4	94-5/8	71
110	5	35-1/4	65-1/2	95-3/4	72
111	5	35-1/2	66	96-1/2	73
112	5	35-7/8	66-3/4	97-5/8	74
113	5	36-1/4	67-1/2	98-3/4	75
114	5	36-1/2	68	99-1/2	76
115	5	36-7/8	68-3/4	100-5/8	77
116	5	37-1/4	69-1/2	101-3/4	78
117	5	37-1/2	70	102-1/2	79
118	5	37-7/8	70-3/4	103-5/8	80
119	5	38-1/4	71-1/2	104-3/4	81
120	5	38-1/2	72	105-1/2	82

ABS-AC WILL ACCOMODATE ANY HINGE
OR STRIKE LAYOUT - ON REQUEST

NOTES :

1. ALL DIMENSIONS ARE IN INCHES.
2. ALL DIMENSIONS ARE MEASURED FROM TOP OF OPENING HEIGHT TO TOP OF HINGE

